




Smart Life

jz

Thank you for using smart camera

1.Product Introduction

Packing list: Smart Camera x 1, Manual x 1, USB Power Cord x 1, Power Adapter x 1, Screw Accessories Package x 1

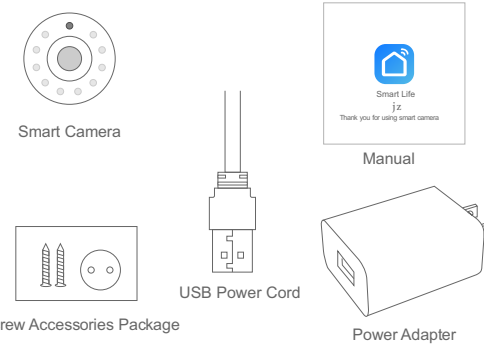

01

Basic Parameters

Product Name: Smart Camera
Pixel: 1.0Mp/2.0MP
Video Compression: H.264 High Profile
Image Enhancement: Digital Wide Dynamic 3D Noise Reduction
Local Storage: MicroTF card
Wireless Encryption: WEP/WPA/WPA2 Encryption
Power Input: 5V 1A(Min)
Total Power Consumption: 5W (Max)
WirelessStandard: 2.4G 802.11 b/g/n
Support Platform: Android/iOS

Component Description:

Reset Button: Long press "reset" hole 5sec, reset success.

It is recommended to insert 8-128GB high-speed Micro TF card, otherwise it will not be able to store, view historical video and support important functions such as firmware upgrading.

02

2.Install APP


Download APP: scan the QR code below to download and install.
Register and login: open the "Smart Life" APP to register and login according to the prompts.



03

3.1. Add The Device-Scan QR code mode


- Make sure Wi-Fi is available and connected to the Internet.
- Connect the camera to the power, then system startup completed.
- Open "Smart Life" APP, press the '+' in the upper right corner of the main screen (Figure 01); choose "Security & Sensor", click "Smart Camera" (Figure 02) to add camera; and then click "Next step" (Figure 03);

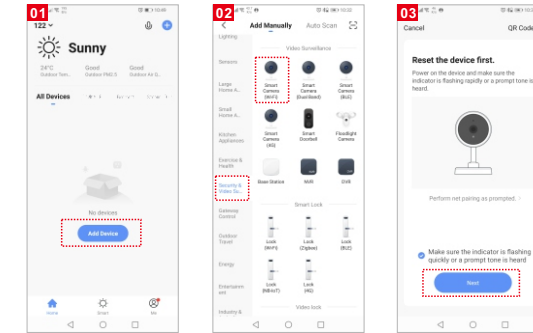

04


3.2. Add The Device-AP Mode

- **Please note that only 2.4 GH Wi-Fi network is supported;**
- If the mobile phone is not connected to wi-fi, please click "Connect to Wi-Fi" (Figure 04);
- It will jump to the WLAN interface and connects Wi-Fi (Figure 05).
- If the phone is connected to Wi-Fi (Figure 06);

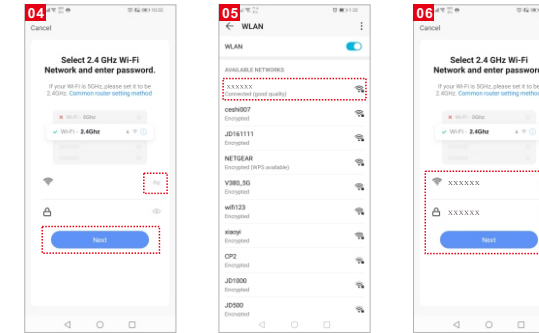


05

- A QR code will prompt on your screen and you need to scan it with the Smart Camera. (the camera is about 20-30 cm away from the mobile phone lens). Then click "hear the prompt sound" (Figure. 07.
- "connecting" (Figure. 08);

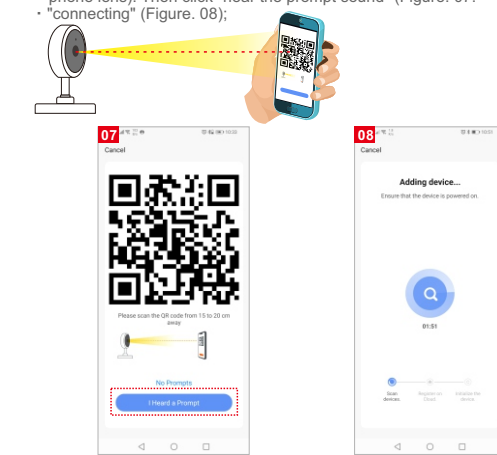

06

- connection completed(Figure 09), and click "Finish";
- Then jump to preview interface (Figure 10)
- After closing the device preview interface, the interface returns to the APP home page. At this time, the connected device will appear on the APP home page (Figure 11). Then you can click directly to the device interface to see the monitoring situation without re-adding afterwards.

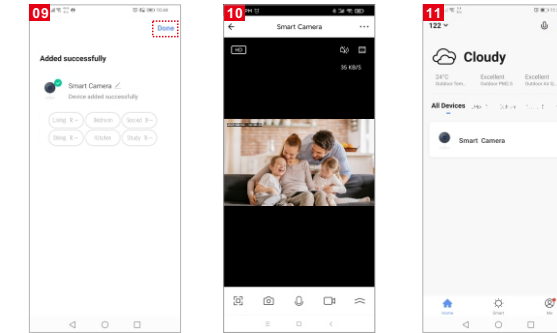


07

3. 2. Add The Device-AP Mode


First set the machine to the hot spot distribution network mode

- Locate the RESET button on the machine and press it for about 1 second, After about 1 minute, the sound will ring and the hotspot will start successfully.

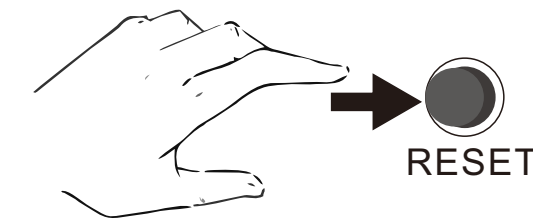


08

- Select "AP Mode" (Figure 12)
- Click Next (Figure 13)
- Enter the account and password that can connect to WIFI (Figure 14)

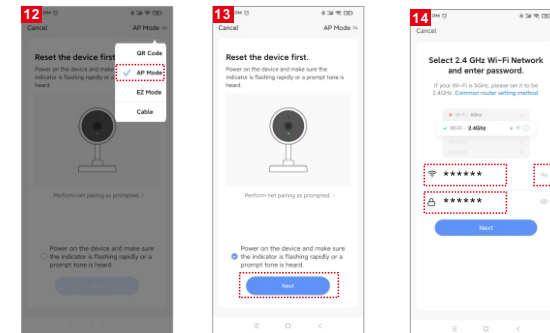


09

- Click "Go Connect" (Figure 15)
- Go to "Smart IF-XXXX" and click Connect (Figure 16)
- Connecting (Figure 17)

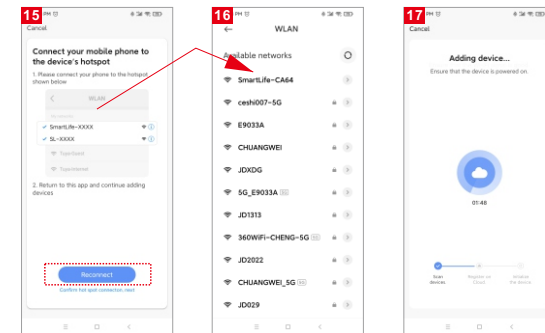


10

- Click to complete the connection (Figure 18)
- Video screen (Picture 19)

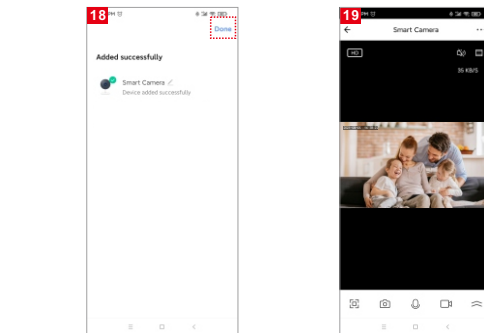

11

4.Other connection methods

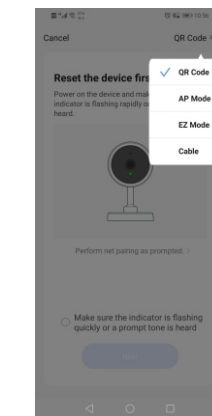

1. QR Code
Camera aiming at QR code
2. AP Mode
Mobile phone search machine signal code
3. EZ Mode
Mobile APP-wifi-search machine
4. Cable
USB cable connection

12

5.Matters Need Attention

Try to keep away from the metal space;
Avoid the furniture , microwave oven blocked;
Avoid the space where the audio, video and data lines are around, and keep the space away from them as large as possible;
Ensure that as close as possible to the coverage of wireless Wi-Fi signals. Switching network environment;
In the new network environment, please press the reset hole about 5 seconds, then connect to the network.

13

The name and content of the harmful substances in the product

Part Name	Harmful Substance					
	Pb	Hg	Cd	Cr(VI)	PBB	PBDE
shell	○	○	○	○	○	○
Board	X	○	○	○	○	○
charger	○	○	○	○	○	○
annex	○	○	○	○	○	○

This form is based on the provisions of SJ/T 11364.

This product conforms to RoHS environmental protection requirements. At present, there is no mature technology in the world to replace or reduce the lead content in the electronic ceramics, porcelain, optical glass, steel and copper alloy.

14

Maintenance records: _____

Maintenance time: _____

Fault conditions: _____

Fault cause: _____

Troubleshooting: _____

Return and exchange proof: _____

Date of validity: _____

Original device ID: _____

New device ID: _____

maintenance personnel signature: _____

Maintenance Department seal: _____

Maintenance voucher of intelligent

Customer: _____ Mobile: _____

Address: _____

Model: _____ Camera ID: _____

Device store: _____ Date of purchase: _____

Store address: _____

Store contact number: _____

Maintenance voucher of intelligent

Customer: _____ Mobile: _____

Address: _____

Model: _____ Camera ID: _____

Device store: _____ Date of purchase: _____

Store address: _____

Store contact number: _____

Maintenance voucher of intelligent

Customer: _____ Mobile: _____

Address: _____

Model: _____ Camera ID: _____

Device store: _____ Date of purchase: _____

Store address: _____

Store contact number: _____

Maintenance voucher of intelligent

Customer: _____ Mobile: _____

Address: _____

Model: _____ Camera ID: _____

Device store: _____ Date of purchase: _____

Store address: _____

Store contact number: _____